


# Product data sheet

## Higo - Splitters

### Splitter series 1T3D

1T3D

<https://www.higoconnector.com/en/e-bike-connector/1t3d>

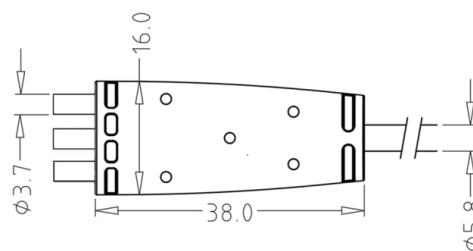

## Specifications

### General Characteristics

|                   |                            |
|-------------------|----------------------------|
| Upper temperature | 80 °C                      |
| Lower temperature | -25 °C                     |
| Protection degree | IP66                       |
| Wire section      | 0,14 / 0,2 mm <sup>2</sup> |
| Splitter size     | 38 x 10,2 x 16 mm          |

# Product data sheet

## Higo - Splitters

### Splitter series 1T3D



### Electrical Parameters

|  |                           |
|--|---------------------------|
| <b>Rated voltage</b>                   | 48 V AC / 60 V DC         |
| <b>Max. insulation resistance (M )</b> | $\geq 20 \text{ M}\Omega$ |
| <b>Max. contact resistance (M )</b>    | $\leq 10 \text{ M}\Omega$ |
| <b>Withstanding voltage</b>            | 500 V                     |