

# Product data sheet



## Higo - Battery - F621A

### Female panel mount connector

## Push-on flexible

F621AM C 00 GA 0300

<https://www.higoconnector.com/en/e-bike-connector/f621amc00ga0300>

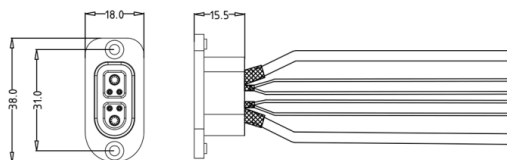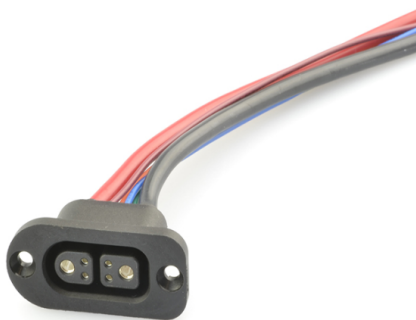

## Specifications

### General Characteristics

<b>Number of contacts</b>	6 (2+4)
<b>Gender</b>	Female
<b>Color</b>	Black
<b>Upper temperature</b>	80 °C
<b>Lower temperature</b>	-25 °C
<b>Locking</b>	Push-on flexible
<b>Protection degree</b>	IP67
<b>Mating cycles (times)</b>	3000 Mating times
<b>Connector diameter</b>	23.4 mm
<b>Cable Length</b>	300 mm
<b>Wire section</b>	2 x 3,3 + 4 x 0,2 mm <sup>2</sup>
<b>Remark</b>	Other cable length/type on request

# Product data sheet

## Higo - Battery - F621A

### Female panel mount connector

#### Electrical Parameters

<b>Rated current</b>	30 / 2 A
<b>Rated voltage</b>	48 V AC / 60 V DC
<b>Max. insulation resistance (M )</b>	$\geq 20$ M $\Omega$
<b>Max. contact resistance (M )</b>	$\leq 10$ M $\Omega$

#### Material

<b>Insulation wire</b>	PVC
<b>Material of contact</b>	Copper alloy
<b>Contact plating</b>	Silver plated