


Product data sheet

Higo - Signal - Micro Q

Micro Q female panel mount connector

Z306QM C 04 00 0000

<https://www.higoconnector.com/en/e-bike-connector/z306qmc04000000>

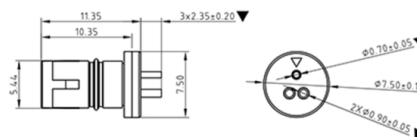

Specifications

General Characteristics

Connector shape	Panel mount
Gender	Female
Color	Yellow
Upper temperature	80 °C
Lower temperature	-25 °C
Locking	Push-on (no locking)
Protection degree	IP67
Mating cycles (times)	50 Mating times
Connector diameter	6 mm
Terminal type	IP67

Product data sheet

Higo - Signal - Micro Q

Micro Q female panel mount connector



Electrical Parameters

Rated current	≤5.2 A
Rated voltage	48 V AC / 60 V DC
Max. insulation resistance (M)	≥20 MΩ
Max. contact resistance (M)	≤10 MΩ

Material

Material of contact	3 Copper Alloy
Contact plating	Gold over Nickel