


Product data sheet

Higo - Motor - Z910A

Male cable connector

Z910AG P 00 AE 1000

<https://www.higoconnector.com/en/e-bike-connector/z910agp00ae1000>

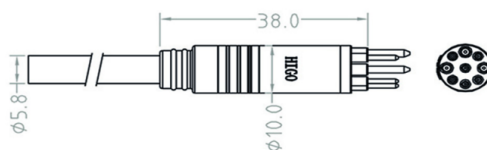

Specifications

General Characteristics

Number of contacts	9 (3+6)
Gender	Male
Color	Black
Upper temperature	80 °C
Lower temperature	-25 °C
Locking	Push-on (no locking)
Protection degree	IP66
Mating cycles (times)	200 Mating times
Connector diameter	13 mm
Fitting length	75 mm
Cable Length	1000 mm
Cable diameter	5.8 mm
Wire section	3 x 1,2 + 6 x 0,2 mm ²
Remark	Other cable length/type on request

Product data sheet

Higo - Motor - Z910A

Male cable connector



Electrical Parameters

Rated current	15 / 2 A
Rated voltage	48 V AC / 60 V DC
Max. insulation resistance (M)	$\geq 20 \text{ M}\Omega$
Max. contact resistance (M)	$\leq 10 \text{ M}\Omega$

Material

Material jacket	PVC
Insulation wire	Teflon
Material of contact	Copper Alloy
Contact plating	Gold over Nickel