


Product data sheet

Higo - Motor - Z913B

Female cable connector

Z913BM P 00 AF 1000

<https://www.higoconnector.com/en/e-bike-connector/z913bmp00af1000>

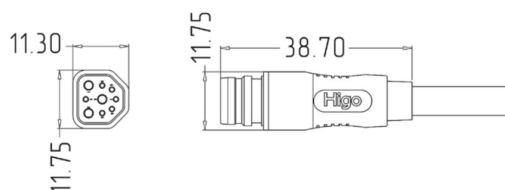

Specifications

General Characteristics

| | |
|--------------------|------------------------------------|
| Number of contacts | 9 (3+6) |
| Connector shape | Plug |
| Gender | Female |
| Color | Black |
| Upper temperature | 80 °C |
| Lower temperature | -25 °C |
| Locking | Push-on (no locking) |
| IP Protection | IP67 |
| Mating cycles | 200 Mating times |
| Connector diameter | 11,75 x 11,30 mm |
| Fitting length | 70.7 mm |
| Cable Length | 1000 mm |
| Cable diameter | 5.8 mm |
| Wire section | 3 x 1,5 mm ² |
| Remark | Other cable length/type on request |

Product data sheet

Higo - Motor - Z913B

Female cable connector

Electrical Parameters

| | |
|-----------------------------------|---------------------------|
| Rated current | 15 / 2 A |
| Rated voltage | 48 V AC / 60 V DC |
| Max. insulation resistance | $\geq 20 \text{ M}\Omega$ |
| Max. contact resistance | $\leq 10 \text{ M}\Omega$ |

Material

| | |
|----------------------------|------------------|
| Material jacket | PVC |
| Insulation wire | PVC |
| Material of contact | Copper Alloy |
| Contact plating | Gold over Nickel |