

Product data sheet


Higo - Battery - F618A

Male cable connector

Push-on flexible

F618AG P 00 GN 1000

<https://www.higoconnector.com/en/e-bike-connector/f618agp00gn1000>

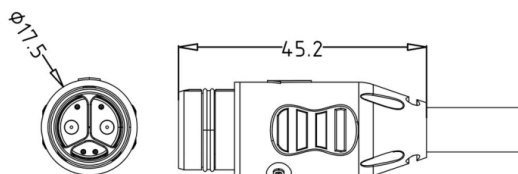

Specifications

General Characteristics

Number of contacts	6 (2+4)
Connector shape	Plug
Gender	Male
Color	Black
Upper temperature	80 °C
Lower temperature	-25 °C
Locking	Push-on flexible
Protection degree	IP67
Mating cycles (times)	3000 Mating times
Connector diameter	38,0 x 18,0 mm
Fitting length	40 mm
Cable Length	1000 mm
Cable diameter	8 mm

Product data sheet

Higo - Battery - F618A

Male cable connector

Wire section	2 x 3,3 + 4 x 0,2 mm ²
Remark	Other cable length/type on request

Product data sheet

Higo - Battery - F618A

Male cable connector

Electrical Parameters

Rated current	30 / 2 A
Rated voltage	48 V AC / 60 V DC
Max. insulation resistance (M)	≥20 MΩ
Max. contact resistance (M)	≤10 MΩ

Material

Material jacket	PVC
Insulation wire	FEP
Material of contact	Copper alloy
Contact plating	Silver plated